

FPD12-200-2000-1-S

12-Way, 0.2~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.2~2GHz
Insertion Loss:	5.2dB max.
Input VSWR:	1.7 max.
Output VSWR:	1.7 max.
Isolation:	16dB min.
Amplitude Balance:	±1.5dB max.
Phase Balance:	±20° max.
Impedance:	50Ω
Power @SUM Port:	1W max. as divider 1W max. as combiner

Mechanical


Size*1:	166*70*12mm 6.535*2.756*0.472in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

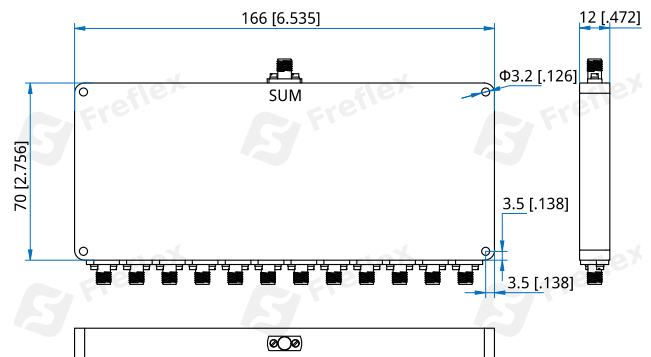

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD12-200-2000-1-S

Customization is available upon request.