

## FPD2-20-500-K1-S

2-Way, 0.02~0.5GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical


Frequency:	0.02~0.5GHz
Insertion Loss:	0.9dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	5° max.
Power @SUM Port:	100W as divider 100W as combiner

### Mechanical

Size <sup>*1</sup> :	60*80*22mm 2.362*3.15*0.866in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Outline Drawings

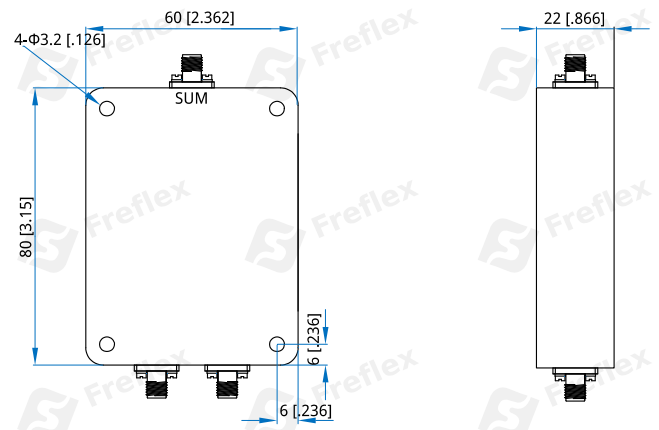

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**FPD2-20-500-K1-S**

Customization is available upon request.