

## FPD2-26000-31000-20-K

### 2-Way, 26~31GHz

#### Features:

- \* Small Size
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

#### Electrical

Frequency:	26~31GHz
Insertion Loss:	1.0dB max.
Input VSWR:	1.5 max.
Output VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	$\pm 4^\circ$
Impedance:	50 $\Omega$
Power @SUM Port:	20W max. as divider 1W max. as combiner

#### Mechanical


Size <sup>*1</sup> :	26*19*10mm 1.024*0.748*0.394in
Weight:	21g
Connectors:	2.92mm Female (Stainless steel)
Mounting:	2- $\Phi$ 2.3mm through-hole

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

#### Outline Drawings

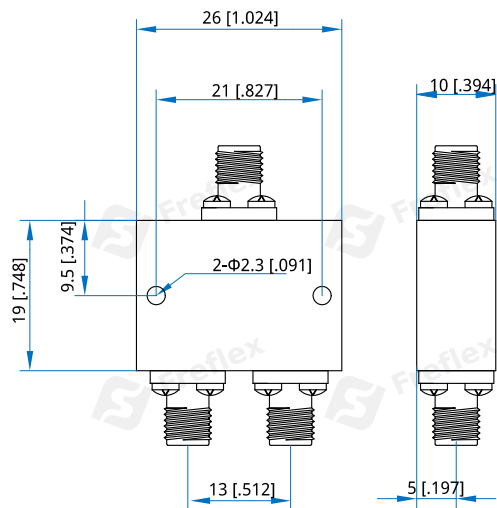

Unit: mm [in]

Tolerance:  $\pm 0.3$ mm [ $\pm 0.012$ in]

#### How To Order

**FPD2-26000-31000-20-K**

Customization is available upon request.