

FPD16-350-2000-5-NS

16-Way, 0.35~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.35~2GHz
Insertion Loss:	1.5dB max.
VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	0.4dB max.
Phase Balance:	$\pm 8^\circ$ max.
Impedance:	50 Ω
Power @SUM Port:	5W max. as divider 5W max. as combiner

Mechanical


Size*1:	220*200*26mm 8.661*7.874*1.024in
Connectors:	N Female, SMA female
Mounting:	4- $\Phi 4.4$ mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

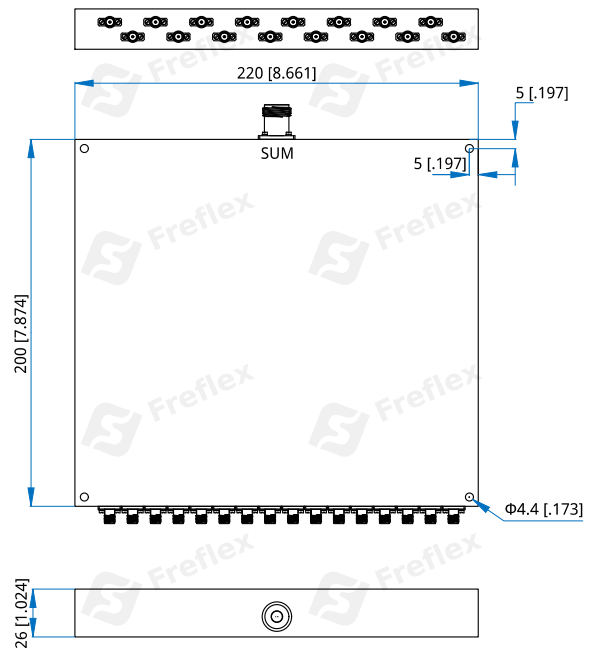

Unit: mm [in]

Tolerance: ± 0.3 mm [± 0.012 in]

How To Order

FPD16-350-2000-5-NS

Customization is available upon request.