

FPD2-30-406-K5-S

2-Way, 0.03~0.406GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical


Frequency:	0.03~0.406GHz
Insertion Loss:	0.5dB max.
VSWR:	1.35 max.
Isolation:	20dB min.
Amplitude Balance:	0.1dB max.
Phase Balance:	3° max.
Power @SUM Port:	500W as divider 500W as combiner

Mechanical

Size ^{*1} :	60*80*22mm 2.362*3.15*0.866in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Outline Drawings

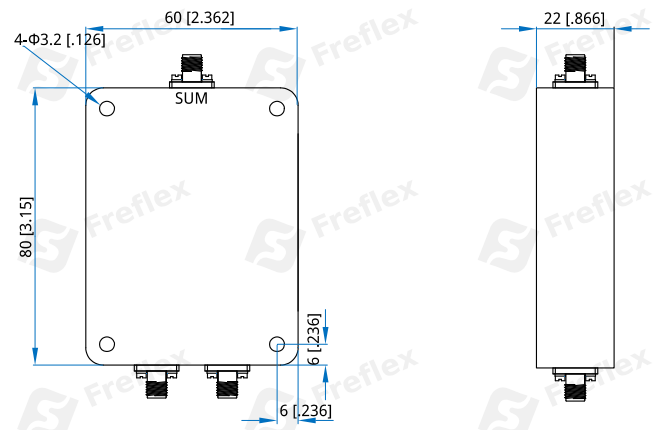

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD2-30-406-K5-S

Customization is available upon request.