

FPD16-5-1000-2-S

16-Way, 5~1000MHz, 2W

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	5~1000MHz
Insertion Loss:	24±2.0dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	24dB min.
Amplitude Balance:	±1.2dB
Impedance:	50Ω
Power @SUM Port:	2W max. as divider

Mechanical

Size ^{*1} :	81.3*80.9*16mm 3.201*3.185*0.63in
----------------------	--------------------------------------


Connectors: SMA Female

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

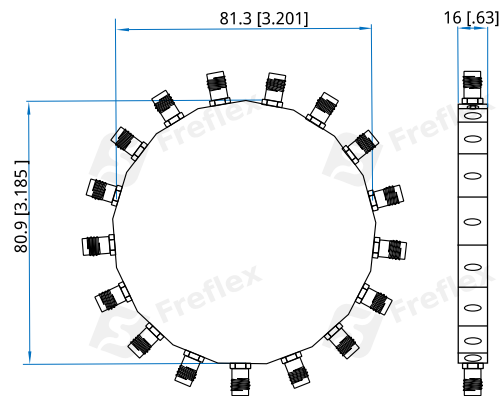

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD16-5-1000-2-S

Customization is available upon request.