



# FPD2-5000-6000-K2-N

2-Way, 5~6GHz

Features:
\* Small Size
\* Low Insertion Loss

Applications: \* Amplifiers

\* Mixers \* Antennas

\* Laboratory Test

### **Electrical**

Frequency: 5~6GHz
Insertion Loss: 0.5dB max.
VSWR: 1.5 max.

Isolation: 15dB min.

Amplitude Balance: ±0.2dB

Phase Balance: ±5°

Power @SUM Port: 200W as divider

#### Mechanical

Size\*1: 30\*36\*20mm

1.181\*1.417\*0.787in

Connectors: N Female


Mounting: 2-Φ2.8mm through-hole

[1] Exclude connectors.

## **Environmental**

Operation Temperature: -40~+85°C

## **Outline Drawings**

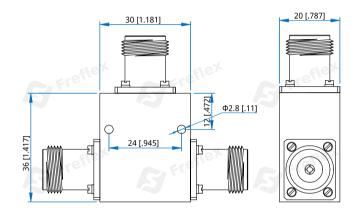

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

## **How To Order**

FPD2-5000-6000-K2-N

Customization is available upon request.

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1