

FPD2-80-400-2K5-7

2-Way, 80~400MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	80~400MHz
Insertion Loss ^{*1} :	0.4dB max.
VSWR:	1.6 max.
Isolation:	13dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	2500W max. as divider 2500W max. as combiner

[1] Excluding theoretical loss 3dB.

Mechanical


Size ^{*2} :	172*124*33mm 6.772*4.882*1.299in
Connectors:	7/16 DIN Female
Mounting:	4-Φ2.8mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

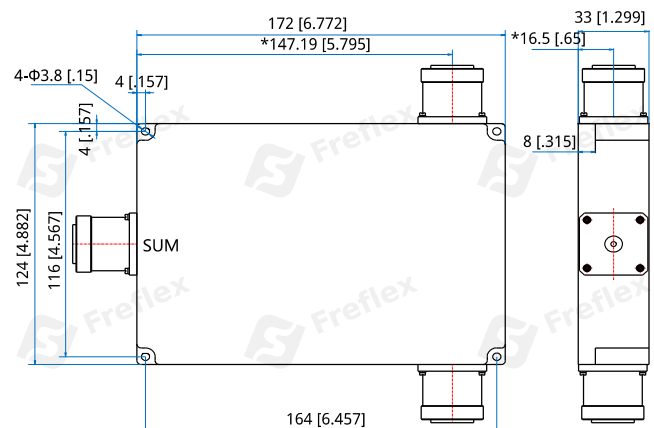

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

*Ensure dimensions for design.

How To Order

FPD2-80-400-2K5-7

Customization is available upon request.