

FPD2-950-2150-30-DC

2-Way, 0.95~2.15GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test



Electrical

Frequency:	0.95~2.15GHz
Insertion Loss:	0.3dB typ.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner
Voltage:	+24V DC max.
Current:	3A

Mechanical

Connectors ^{*1} :	SMA Female N Female TNC Female SMP Male
Mounting:	3-Φ2.2mm through-hole 4-Φ3.2mm through-hole

[1] Female connectors can be replaced with male connectors on request.

Environmental

Operating Temperature:	-35~+75°C
Non-operating Temperature:	-45~+85°C

How To Order

FPD2-950-2150-30-Y-DC

Y: Connector type

Connector naming rules:

S - SMA female (Outline A)

N - N female (Outline B)

T - TNC Female (Outline C)



P - SMP Male

Examples:

To order a 2-Way Power Divider/Combiner, 0.95~2.15GHz, 30W, SMA Female, port 1 is DC blocked, specify FPD2-950-2150-30-S-DC with comments port 1 is DC blocked.

Customization is available upon request.

Outline Drawings


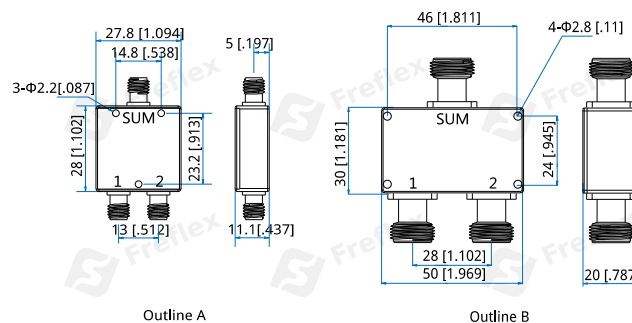


Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]



2-Way Power Dividers/Combiners

Typical Performance Curves

SMA

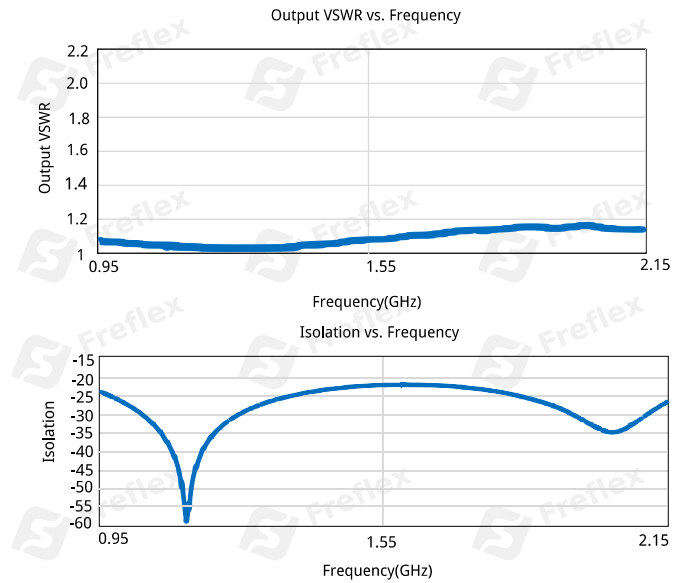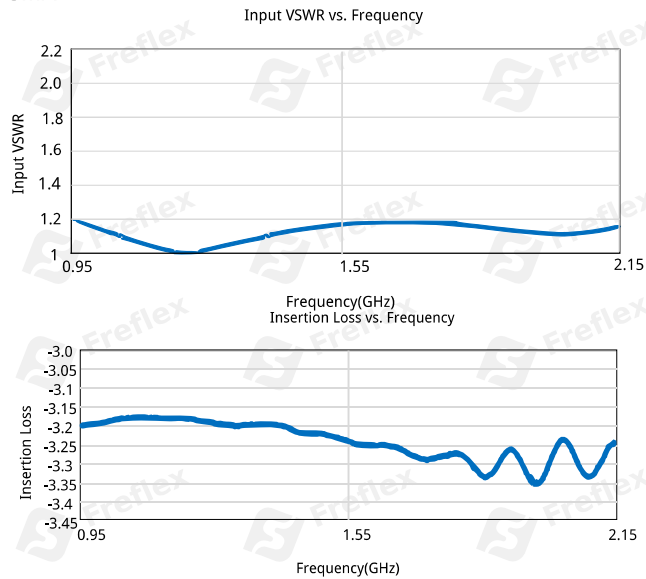


N

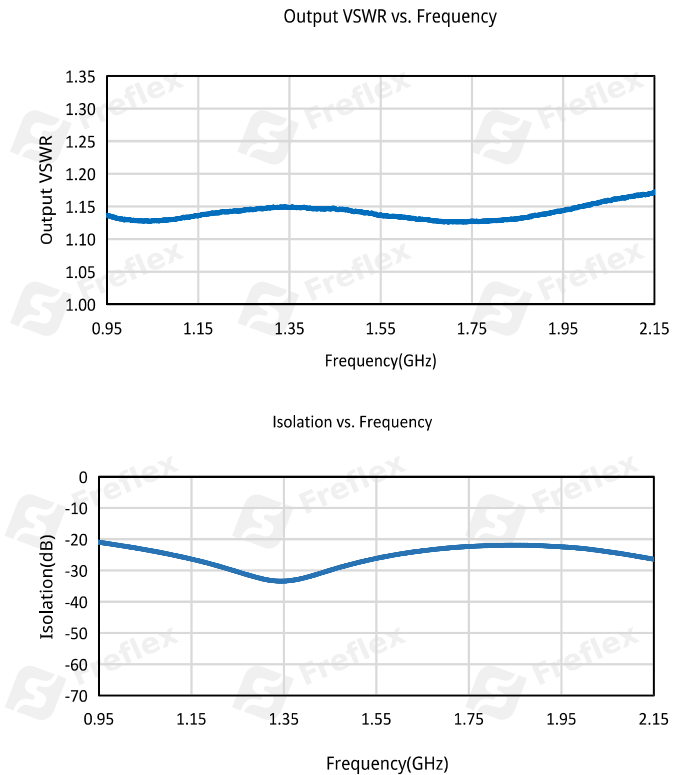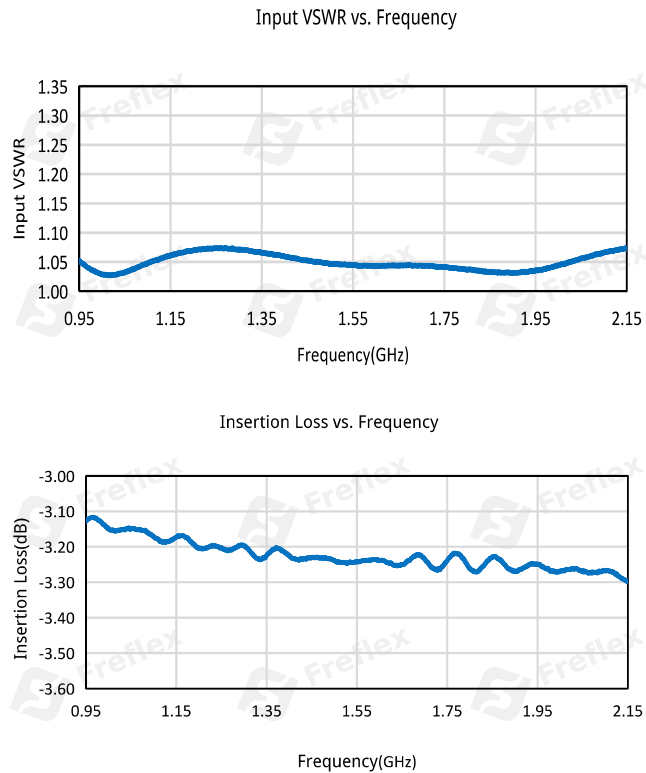


2-Way Power Dividers/Combiners


Phase Balance vs. Frequency

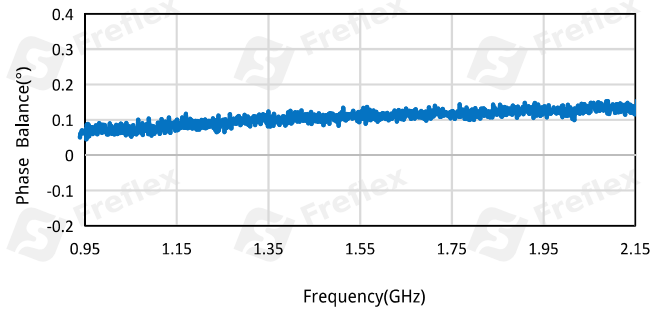


Amplitude Balance vs. Frequency

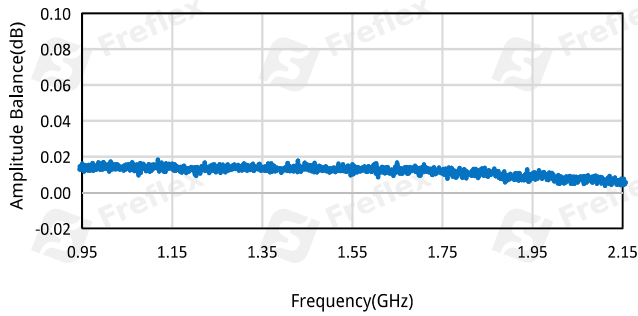


Output VSWR vs. Frequency

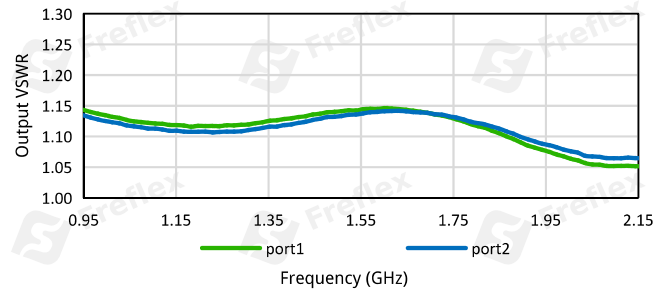


Input VSWR vs. Frequency

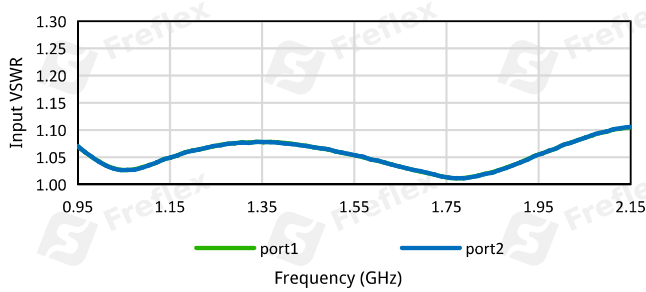


Isolation vs. Frequency

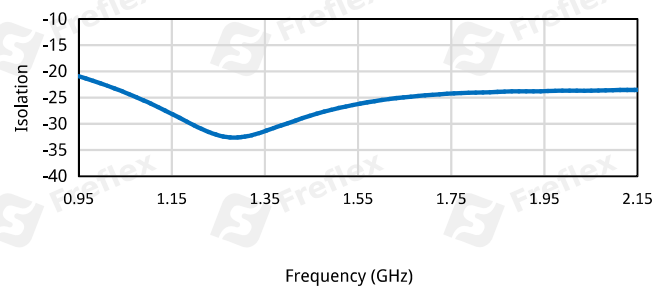

Insertion Loss vs. Frequency

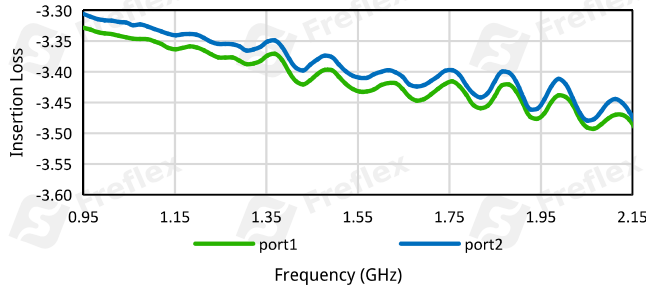

Phase balance vs. Frequency

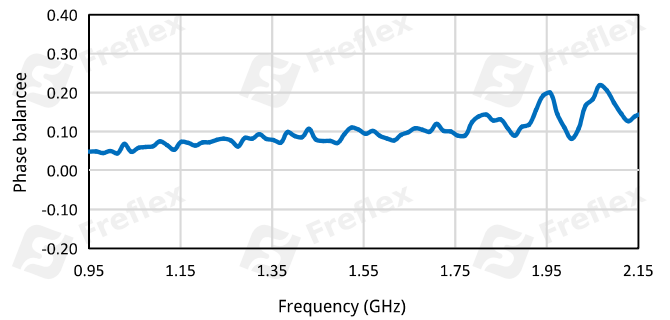

Amplitude balance vs. Frequency

