

## FHC8-200-1000-K75-N

0.2~1GHz, 750W

Features:  
 \* Broadband  
 \* High Power  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	0.2~1GHz
Insertion Loss:	0.3dB max.
VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	±0.35dB max.
Phase Balance:	180±5° max.
Average Power:	750W max.
Impedance:	50Ω

### Mechanical


Size*1:	215.9*127*38.1mm 8.5*5*1.5in
Connectors:	N Female
Mounting:	10-Φ4.6mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature: -40~+85°C

### Outline Drawings

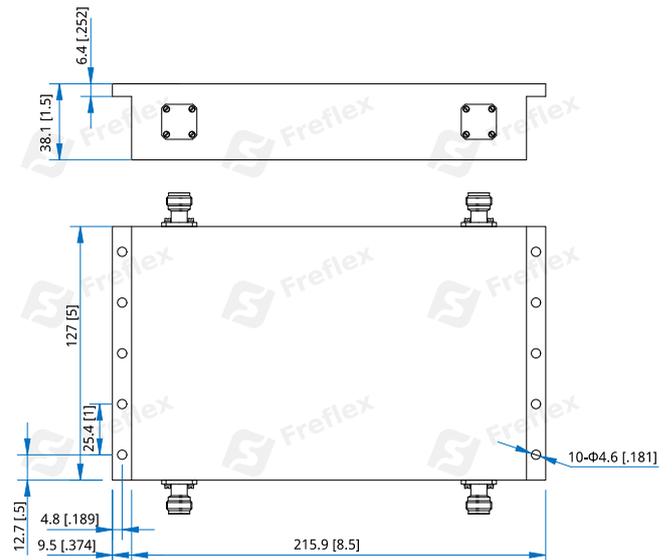

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FHC8-20-1000-K75-N**

Customization is available upon request.