

FHC8-2000-12400-50-S

2~12.4GHz, 50W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~12.4GHz
Insertion Loss:	1.8dB max.
Isolation:	17dB min.
VSWR:	1.8 max.
Amplitude Balance:	±1dB max.
Phase Balance:	±10°
Average Power:	50W
Impedance:	50Ω

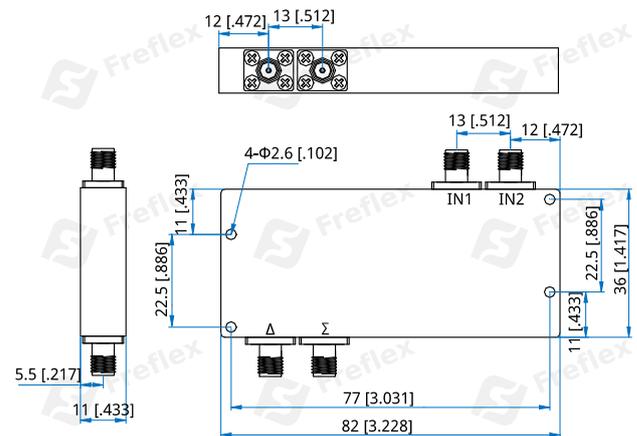
Mechanical

Size*1:	82*36*11mm 3.228*1.417*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FHC8-2000-12400-50-S

Customization is available upon request.