

FHC8-2000-2300-K3-N

2~2.3GHz, 300W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	2~2.3GHz
Insertion Loss:	0.5dB max. (average)
Isolation:	18dB min.
VSWR:	1.35 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±4° max.
Power:	300W CW
Impedance:	50Ω

Mechanical


Size*1:	114*66*20mm 4.488*2.598*0.787in
Connectors:	N Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -55~+85°C

Outline Drawings

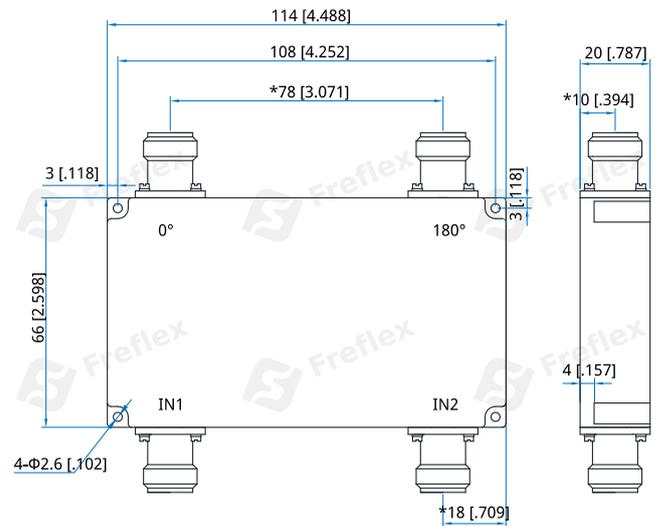

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in], *Ensure dimensions for design.

How To Order

FHC8-2000-2300-K3-N

Customization is available upon request.