

FHC8-225-400-30-S

225~400MHz, 30W

Features:
 * Broadband
 * High Power
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

| | |
|--------------------|-------------|
| Frequency: | 225~400MHz |
| Insertion Loss: | 1.0dB max. |
| VSWR: | 1.4 max. |
| Isolation: | 18dB min. |
| Amplitude Balance: | ±0.8dB max. |
| Phase Balance: | ±10° |
| Average Power: | 30W max. |
| Impedance: | 50Ω |

Mechanical


| | |
|----------------------|--------------------------------|
| Size ^{*1} : | 13*96*96mm 0.51*3.78*3.78in |
| RF Connectors: | SMA Female |
| Mounting: | 2-Φ3mm through-hole |

[1] Exclude connectors.

Environmental

| | |
|--------------|-----------|
| Temperature: | -45~+85°C |
|--------------|-----------|

Outline Drawings

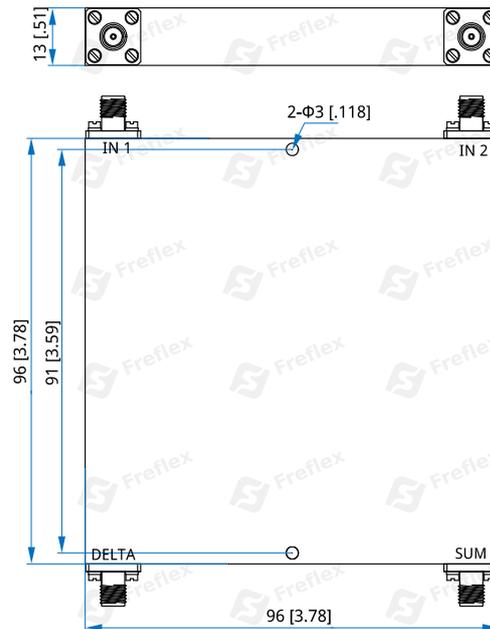

Unit: mm [in]
 Tolerance: ±0.3mm [±0.012in]

How To Order

FHC8-225-400-30-S

Customization is available upon request.