

## FHC8-350-1000-K25-N

0.35~1GHz, 250W

### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	0.35~1GHz
Insertion Loss:	0.5dB max.
Isolation:	20dB min.
VSWR:	1.3 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±7° max.
Average Power:	250W
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	150*100*24mm 5.906*3.937*0.945in
RF Connectors:	N Female
Mounting:	2-Φ4.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

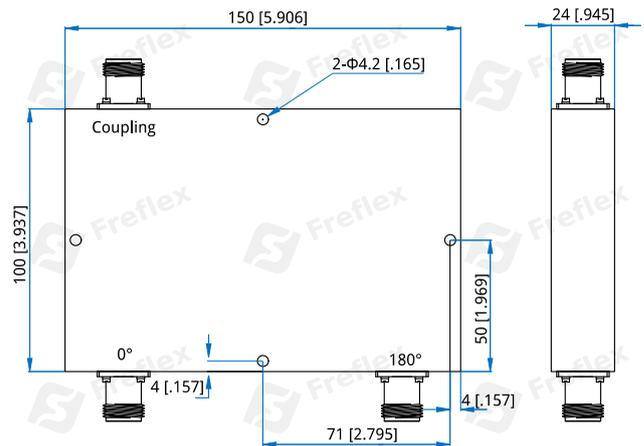

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FHC8-350-1000-K25-N**

Customization is available upon request.