

FHC8-500-6000-30-S

0.5~6GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	3.6dB max.
Isolation:	18dB min.
VSWR:	1.5 max.
Amplitude Balance:	±1dB max.
Phase Balance:	±9° max.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size*1:	254*71.1*12.7mm 10*2.799*0.5in
Connectors:	SMA Female
Mounting:	8-Φ2.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

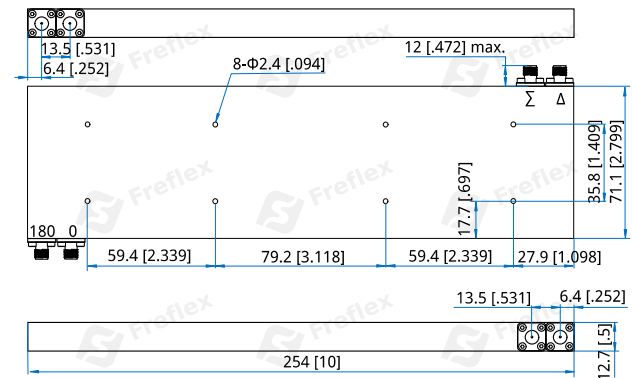

Unit: mm [in]

Tolerance: .xx±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

FHC8-500-6000-30-S

Customization is available upon request.