

FWCK-75

WR-75, 9.84~15GHz


Features:
 * Broad Band
 * Low VSWR

Applications:
 * Calibration
 * Laboratory Test

Components

Part Number	Frequency (GHz)	VSWR (Max.)	Description	Material	Finish	Coating	Quantity (pcs)	Outline Drawings
FWCA-75-SF-R-1	9.84~15	1.2	Waveguide to coax adapter, WR-75 (BJ120) to SMA(f), right angle, FBP120	Aluminium	Conductive oxidation	Black paint	2	Outline A
FWT75-2-A-1	9.84~15	1.03	Low power waveguide termination, WR-75 (BJ120), 2W, FBP120	Aluminium	Conductive oxidation	Sea gray	1	Outline B
FWS75-A-1	9.84~15	-	Waveguide short, WR-75 (BJ120), 8mm, FBP120	Aluminium	-	-	1	(Diagram D)
FWSS75-8.08-A-1	9.84~15	-	1/4λ Waveguide straight section, WR-75 (BJ120), 8.08mm, FBP120	Aluminium	-	-	1	(Diagram C)
Storage Box	Aluminum Alloy						1	-
Screw							1 set	-

Outline Drawings

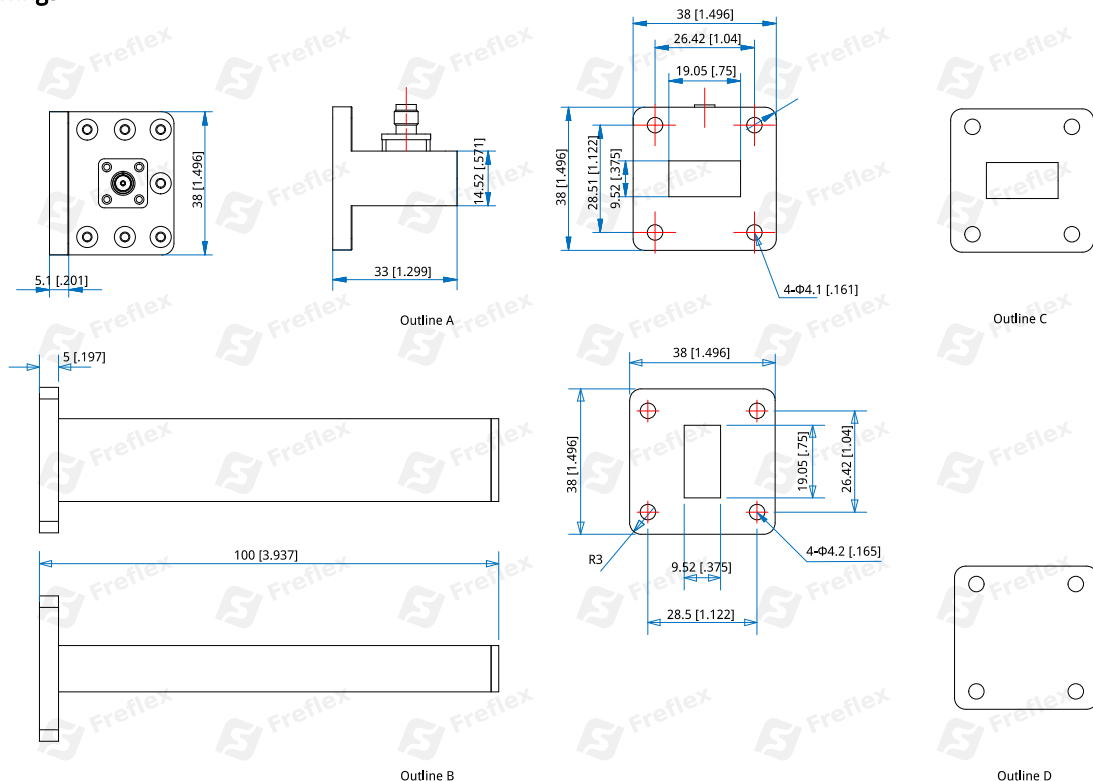

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

Environmental

Operating Temperature: -40~+85°C

Non-operating Temperature: -55~+150°C

How To Order**FWCK-75** All the 5 components in one box.