

FMS62T

DC~50GHz, SP3T~SP6T, Terminated

Features:

- * High Power
- * Long Operation Life

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency: DC~50GHz
Impedance: 50Ω

Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
DC-6	0.3	70	1.3
6-12	0.4	60	1.4
12-18	0.5	55	1.5
18-26.5	0.7	55	1.7
26.5-32	0.9	50	1.9
32-40	1.0	50	2.0
40-50	1.2	45	2.2

Voltage *1(V)		12	24	28
Current (mA)	Normally Open	300	200	180
	Latching	320	200	180

[1] The voltage can be selected according to user requirements.

Mechanical


Size*2:	Φ59*61.5mm Φ2.323*2.421in
Switching Sequence:	Break before Make
Switching Time:	15mS max.
Operation Life:	2M Cycles
Vibration (operating):	20-2000Hz, 10G RMS
Mechanical Shock (non-operating):	30G, 1/2sine, 11mS
RF Connectors:	2.4mm Female
Power Supply & Control Interface Connectors:	D-Sub 15/26
Mounting:	4-Φ5mm through-hole

[2] Exclude connectors.

Environmental

Temperature:	-25~+65℃
Extended Temperature:	-45~+85℃

Outline Drawings

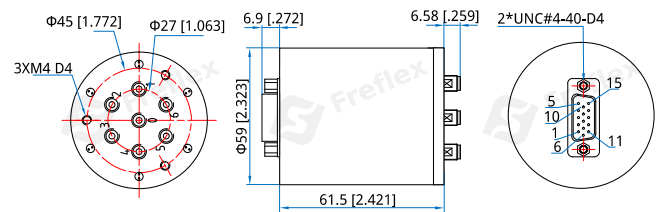

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Additional Options

TTL: T

Indicators: I

Extended Temperature: Z

Positive Common

Waterproof Sealing Type

How To Order

FMSV2T-F-WXYZ

V: 3~6 (SP3T~SP6T)

F: Frequency in GHz

W: Actuator Type. Latching: 1, Normally Open: 3.

X: Voltage. +12V: E, +24V: K, +28V: M.

Y: Power Interface. D-Sub: 1.

Z: Additional Options.

Examples:

To order a SP4T terminated switch, DC-40GHz, Normally Open, +12V, D-Sub, TTL, Indicators, specify FMS42T-40-3E1TI.

Customization is available upon request.

Pin Numbering

Normally Open

Pin	Function	Pin	Function
1~6	V1~V6	14	Indicator (Com)
7	COM	15	NC
8~13	Indicator (1~6)		

Normally Open & TTL

Pin	Function	Pin	Function
1~6	A1~A6	9~14	Indicator (1~6)
7	VDC	15	Indicator (Com)
8	COM		

Latching

Pin	Function	Pin	Function
1~6	V1~V6	15	Indicator (Com)
7	V (RESET)	16	VDC
8	COM	17~26	NC
9~14	Indicator (1~6)		

Latching switch should power on pin 7 to reset before excitation.

Latching & TTL

Pin	Function	Pin	Function
1~6	A1~A6	10~15	Indicator (1~6)
7	RESET	16	Indicator (Com)
8	VDC	17~26	NC
9	COM		

Driving Schematic Diagram

