

FPD2-100-520-2K-7N

2-Way, 0.1~0.52GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.1~0.52GHz
Insertion Loss:	0.25dB max.
VSWR:	1.4 max.
Isolation:	20dB min.
Amplitude Balance:	0.1dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	2000W max. as divider 2000W max. as combiner

Mechanical


Size ^{*1} :	240*220*60mm 9.449*8.661*2.362in
Connectors:	7/16 DIN Female N Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

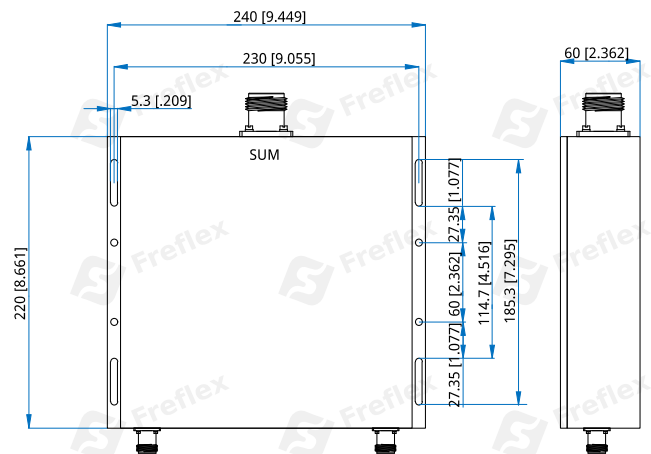

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD2-100-520-2K-7N

Customization is available upon request.