

FMS8F&B

DC~2.15GHz, SP8T

Features:

- * Low VSWR
- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~2.15GHz
Impedance:	75Ω
Power:	10W CW
Voltage:	12V DC/60mA

Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
DC~1	0.8	60	1.5
1~2.15	1.2	50	1.6

Mechanical

Switching Sequence:	Break Before Make
Switching Time:	10mS max.
Operation Life:	1M Cycles
RF Connectors:	F Female
Power Supply & Control Interface Connectors:	Feed Through/Terminal Post
Mounting:	4-Φ2.6mm through-hole

Environmental

Temperature:	-40~+85°C
--------------	-----------

How To Order

FMS8C-F-WXYZ

C: Connector Type.

F: Frequency in GHz.

W: Actuator Type. Failsafe: 0.

X: Voltage. +12V: E

Y: Power Interface. Pin: 0.

Connector naming rules:

F - F (Outline A)


B - BNC

Examples:

To order a SP8T switch, F Female, DC-2.15GHz, Failsafe, +12V, Pin, specify FMS8F-2.15-0E0.

Customization is available upon request.

Outline Drawings

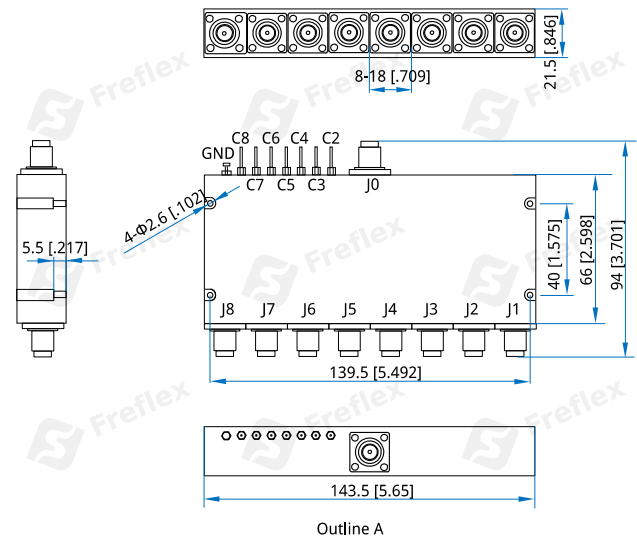

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

RF Path	C2	C3	C4	C5	C6	C7	C8
J0 to J1	0	0	0	0	0	0	0
J0 to J2	+12V	0	0	0	0	0	0
J0 to J3	0	+12V	0	0	0	0	0
J0 to J4	0	0	+12V	0	0	0	0
J0 to J5	0	0	0	+12V	0	0	0
J0 to J6	0	0	0	0	+12V	0	0
J0 to J7	0	0	0	0	0	+12V	0
J0 to J8	0	0	0	0	0	0	+12V