

FMSD2V DC~53GHz, DPDT

Features:

- * Low VSWR
- * Low Insertion Loss
- * High Isolation

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~53GHz
Impedance:	50Ω
Control:	TTL High: 3~5V TTL Low: 0~0.3V

Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
DC-6	0.3	70	1.2
6-12	0.4	70	1.3
12-18	0.5	60	1.3
18-26.5	0.7	55	1.4
26.5-32	0.8	50	1.4
32-40	0.9	50	1.7
40-43	1.0	50	1.7
43-50	1.2	50	1.8
50~53	1.5	50	1.8

Voltage*1 (V)	+12	+24	+28	
Current (mA)	Failsafe	350	200	180
	Latching	400	200	185

[1] The voltage can be selected according to user requirements.

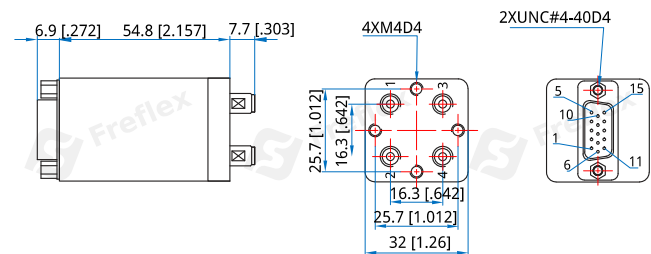
Mechanical

Size*2:	32*32*54.8mm 1.26*1.26*2.157in
Switching Sequence:	Break before Make
Switching Time:	15mS max.
Operation Life:	2M Cycles
Vibration (operating):	20-2000Hz, 10G RMS
Mechanical Shock (non-operating):	30G, 1/2sine, 11mS
RF Connectors:	1.85mm Female
Power Supply & Control Interface Connectors:	D-Sub 15Pin male
Mounting:	4-M4mm deep 4mm

[2] Exclude connectors.

Environmental

Temperature:	-25~+65°C
Extended Temperature:	-45~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

Additional Options

TTL: T
Indicators: I
Extended Temperature: Z
Positive Common
Waterproof Sealing Type

How To Order
FMSD2V-F-WXYZ

F: Frequency in GHz
W: Actuator Type. Failsafe: 0, Latching: 1.
X: Voltage. +12V: E, +24V: K, +28V: M.
Y: Power Interface. Pin: 0, D-Sub: 1.
Z: Additional Options.

Examples:

To order a DPDT switch, DC-18GHz, Failsafe, +12V, D-Sub, TTL, Indicators, specify FMSD2V-18-0E1TI.

Customization is available upon request.

Pin Numbering

Failsafe

Pin	Function	Pin	Function
1	COM	13~14	Indicator (1~2)
2	VDC(RF: 1 to 3)	15	Indicator (COM)
3~12	NC		

Failsafe&TTL

Pin	Function	Pin	Function
1	VDC	4~12	NC
2	COM	13~14	Indicator (1~2)
3	A1(RF: 1 to 3)	15	Indicator (COM)

Latching

Pin	Function	Pin	Function
1	V1(RF: 1 to 2)	4~12	NC
2	V2(RF: 1 to 3)	13~14	Indicator (1~2)
3	COM	15	Indicator (COM)

Latching&TTL

Pin	Function	Pin	Function
1	VDC	5~12	NC
2	COM	13~14	Indicator (1~2)
3	A1(RF: 1 to 2)	15	Indicator (COM)
4	A2(RF: 1 to 3)		