

FDI4020X

High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

FDI4020X series Drop-In Isolators cover frequency range 600~2700MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Temperature (°C)
870~880	10	0.50	60.0	1.20	100	10~100	-30~+70
930~960	30	0.50	60.0	1.20	100	10~100	-30~+70
1805~1880	75	0.50	55.0	1.20	100	10~100	-30~+70
2010~2025	15	0.50	60.0	1.20	100	10~100	-30~+70
2110~2170	60	0.60	50.0	1.20	100	10~100	-30~+70
2300~2700	400	0.80	40.0	1.20	100	10~100	-30~+70
2400~2500	100	0.50	50.0	1.20	100	10~100	-30~+70
2500~2600	100	0.50	50.0	1.20	100	10~100	-30~+70
2600~2700	100	0.50	50.0	1.20	100	10~100	-30~+70

Outline Drawings

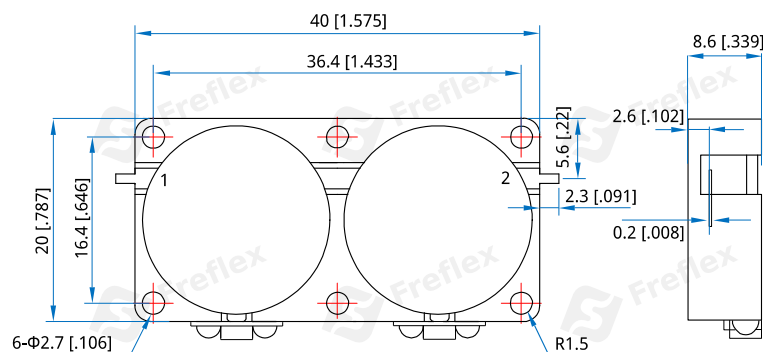

Unit: mm [inch] Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size^{*1}: 40*20*8.6mm
1.575*0.787*0.339in

Connector Type: Strip line

Mounting: 6- $\Phi 2.7\text{mm}$ through-hole

[1] Exclude connectors and terminations.

How To Order

FDI4020X-V-W-X-Y-Z

V: Start frequency in MHz

W: Stop frequency in MHz

X: Forward Power in W

Y: Reverse Power in W

Z: Direction type

Direction Naming Rules:

- 1 - Clockwise
- 2 - Anticlockwise

Examples:

To order a FDI4020X series Isolator, 870~880MHz, Forward power 100W, Reverse power 10W, Clockwise, specify FDI4020X-870-880-K1-10-1.

Customization is available upon request.