

FBDC-4000-6000-K4-40-NS

4~6GHz, 400W, 40dB

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~6GHz
Insertion Loss:	0.6dB max.
Coupling:	40±1.5dB
VSWR:	1.3 max.
Average Power ^{*1} :	400W min.
Directivity:	10dB min.


[1] Derated linearly to 0.5W@120°C.

Mechanical

Size ^{*2} :	50*50*19.5mm 1.969*1.969*0.768in
Connectors:	SMA Female, N Female
Mounting:	2-M2.5, depth 6mm

[2] Exclude connectors.

Outline Drawings

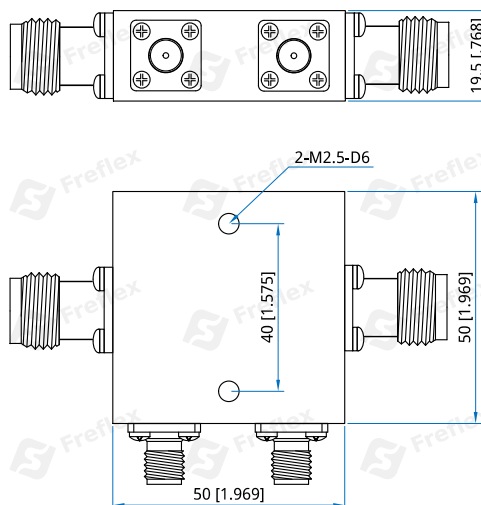

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FBDC-4000-6000-K4-40-NS

Customization is available upon request.