

FPD2-1000-9000-30

2-Way, 1~9GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	1~9GHz
Insertion Loss:	1.4dB max. (SMA) 1.5dB max. (N)
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner


Mechanical

Mounting:	4-Φ2.8mm through-hole (SMA)
Mounting:	4-Φ3.2mm through-hole (N)

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

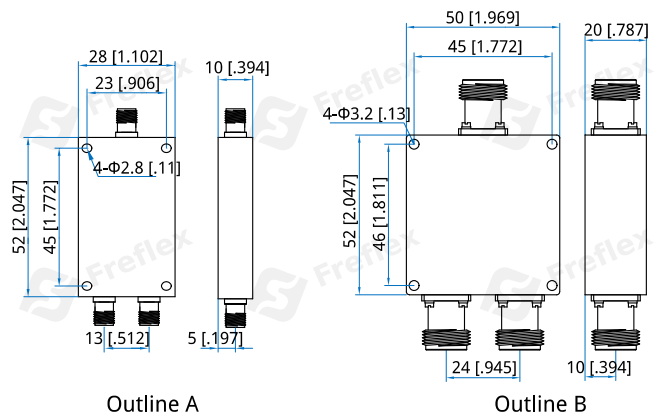

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FPD2-1000-9000-30-Y

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)

N - N Female (Outline B)

Examples:

To order a 2-way power divider, 1~9GHz, 30W, N female, specify FPD2-1000-9000-30-N.

Customization is available upon request.