

## FDDC-0.5-32-5K-40-N7

0.5~32MHz, 5000W, 40dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	0.5~32MHz
Coupling:	40±1dB
Coupling Flatness:	±0.5dB max.
VSWR:	1.2 max.
Insertion Loss:	0.15dB max.
Directivity:	18dB min.
Average Power:	5000W CW

### Mechanical


Size*1:	125*110*50mm 4.921*4.331*1.969in
RF Connectors:	N female
Coupling Connectors:	L29 female
Mounting:	4-M3mm-6H D6

[1] Exclude connectors

### Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

### Outline Drawings

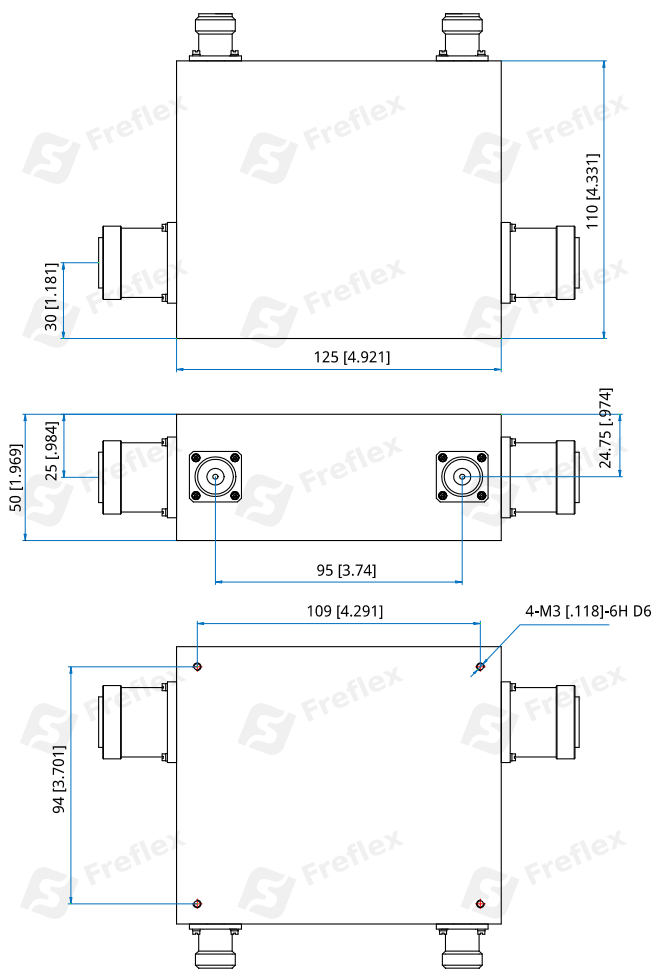

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FDDC-0.5-32-5K-40-N7**

Customization is available upon request.