

FPD2-20-1000-K5-N

2-Way, 0.02~1GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.02~1GHz
Insertion Loss:	0.7dB max.
VSWR:	1.35 max.
Isolation:	15dB min.
Amplitude Balance:	0.1dB max.
Phase Balance:	3° max.
Impedance:	50Ω
Power @SUM Port:	500W max. as divider 500W max. as combiner

Mechanical

Size ^{*1} :	80*120*34mm 3.15*4.724*1.339in
Connectors:	N Female

[1] Exclude connectors.

Environmental


Temperature:	-55~+125°C
--------------	------------

How To Order

FPD2-20-1000-K5-N

Customization is available upon request.

Outline Drawings

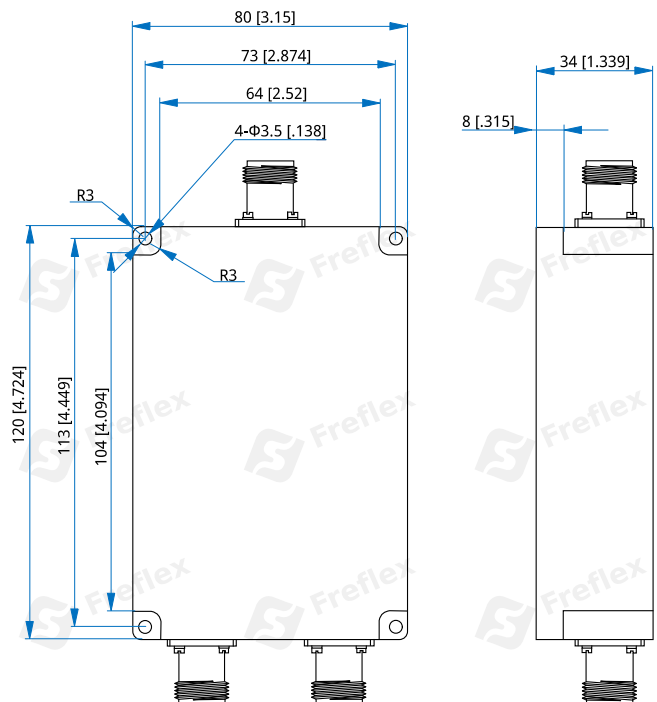

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]