

FPD2-200-2000-K4-T

2-Way, 0.2~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.2~2GHz
Insertion Loss:	0.8dB max.
VSWR(SUM):	1.5 max.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±6° max.
Impedance:	50Ω
Power @SUM Port:	400W max. as divider 400W max. as combiner

Mechanical


Size ^{*1} :	138*104*12mm 5.433*4.094*0.472in
Connectors:	TNC
Mounting:	4-Φ3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

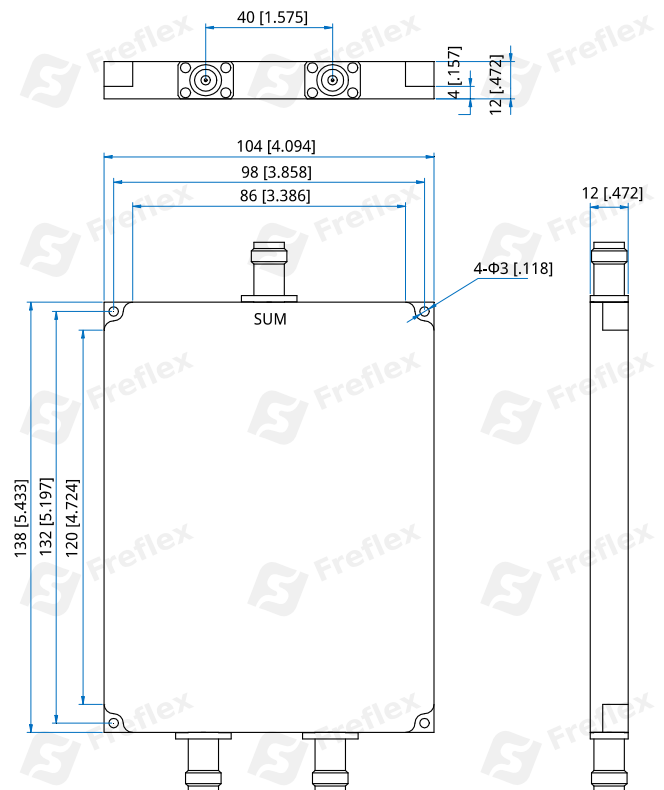

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FPD2-200-2000-K4-T

Customization is available upon request.