

FPD2-2000-6000-K4-N

2-Way, 2~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~6GHz
Insertion Loss:	0.4dB max.
VSWR:	1.4 max.
Amplitude Balance:	±0.3dB max.
Phase Balance:	±4° max.
Power @SUM Port:	400W as divider 400W as combiner

Mechanical

Size ^{*1} :	58*56*22mm 2.283*2.205*0.866in
Connectors:	N Female
Mounting:	4-Φ2.6mm through-hole

[1] Exclude connectors.

Environmental


Temperature:	-55~+85°C
--------------	-----------

How To Order

FPD2-2000-6000-K4-N

Customization is available upon request.

Outline Drawings

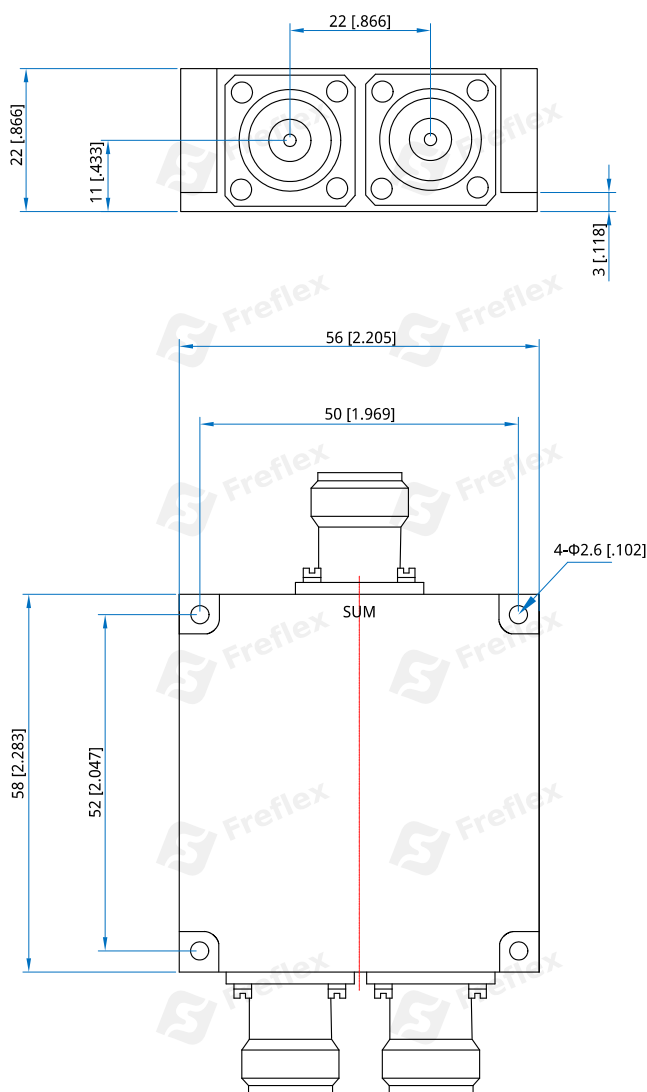

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]