

FPD2-2400-2500-K3-S

2-Way, 2.4~2.5GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2.4~2.5GHz
Insertion Loss:	0.3dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	30dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	$\pm 2^\circ$
Impedance:	50 Ω
Power @SUM Port:	300W max.as divider 15W max. as combiner

Mechanical


Size ^{*1} :	70*50*14mm 2.756*1.969*0.551in
Connectors:	SMA Female
Mounting:	4- Φ 3.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

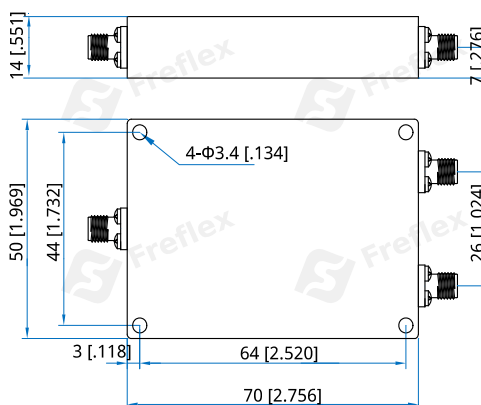

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FPD2-2400-2500-K3-S

Customization is available upon request.