

FWT7-R3

WR-7, 0.3W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	113~173GHz
Average Power	0.3W
VSWR:	1.2 max.

Mechanical

Interface:	WR-7 (BJ1400)
Flange:	FUGP1400
Material:	Copper

How To Order

FWT7-R3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a low power waveguide termination, WR-7, 0.3W, Copper, FUGP1400, specify FWT7-R3-C-15.

Customization is available upon request.

Outline Drawings

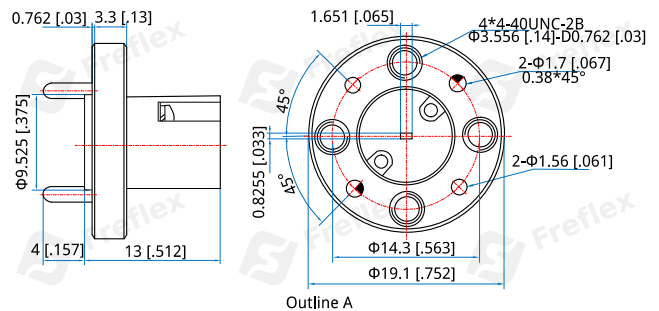

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]