

FWT8-R3

WR-8, 0.3W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency:	92.2~140GHz
Average Power	0.3W
VSWR:	1.2 max.

Mechanical

Interface:	WR-8 (BJ1200)
Flange:	FUGP1200
Material:	Gold plated copper

How To Order

FWT8-R3-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a low power waveguide termination, WR-8, 0.3W, Copper, FUGP1200, specify FWT8-R3-C-15.

Customization is available upon request.

Outline Drawings

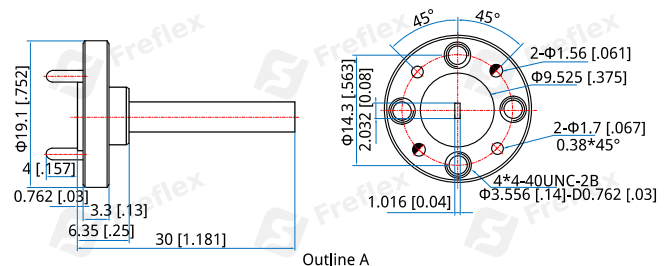

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]