

FSDC-1290-1310-70

1.29~1.31GHz, 70W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1.29~1.31GHz
Insertion Loss:	1.8dB max. 0.8dB max. (10dB)
Coupling:	6±1, 10±1dB
Directivity:	20dB min.
VSWR:	1.3 max.
Average Power:	70W
Impedance:	50Ω

Mechanical

Size*1:	120*40*16.5mm 4.724*1.575*0.65in
Connectors:	N Female
Mounting:	2-Φ4mm through-hole

[1] Exclude connectors and terminations.

How To Order

FSDC-1290-1310-70-X-Y

X: Coupling: 6, 10

Y: Connector type

Connector naming rules:


N - N Female

Examples:

To order a single directional coupler, 1.29~1.31GHz, 70W, 10dB, N Female, specify FSDC-1290-1310-70-10-N.

Customization is available upon request.

Outline Drawings

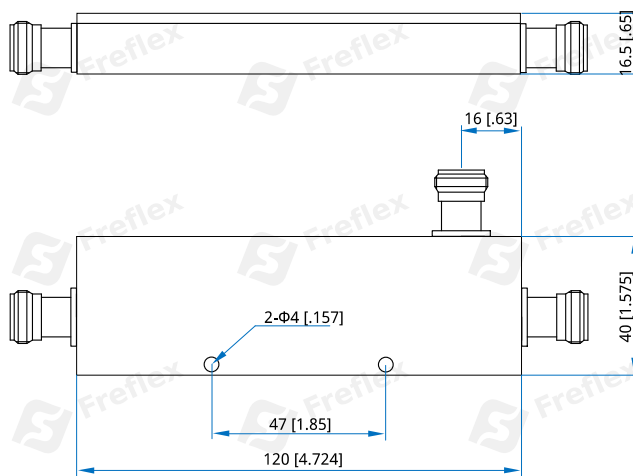

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]