

## FSDC-2500-6000-50-6-S

2.5~6GHz, 50W, 6dB

### Features:

- \* Broadband
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	2.5~6GHz
Insertion Loss:	0.8dB max.
VSWR:	1.2 max.
Directivity:	20dB min.
Coupling:	6±1dB
Coupling Flatness:	±1.0dB max.
Impedance:	50Ω
Average Power:	50W

### Mechanical


Size <sup>*1</sup> :	43*15*11mm 1.69*0.59*0.43in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

### Environmental

Temperature:	-45~+85°C
--------------	-----------

### Outline Drawings

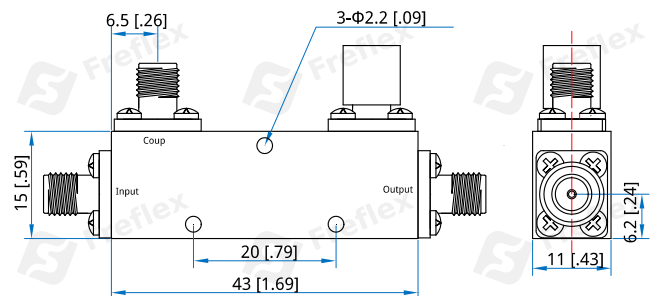

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**FSDC-2500-6000-50-6-S**

Customization is available upon request.