

FPD2-400-18000-20-S

2-Way, 0.4~18GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.4~18GHz
Insertion Loss:	1.2dB max.
Input VSWR:	1.7 max.
Output VSWR:	1.5 max.
Isolation:	12dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±5°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

Mechanical


Size ^{*1} :	157*26*10mm 6.181*1.024*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

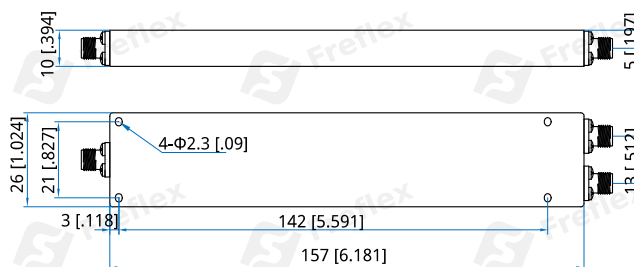

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD2-400-18000-20-S

Customization is available upon request.