

FPD2-500-6000-K3-4

2-Way, 0.5~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.5~6GHz
Insertion Loss:	1.0dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	5°
Impedance:	50Ω
Power @SUM Port:	300W max. as divider

Mechanical

Size ^{*1} :	180*32*26mm 7.087*1.26*1.024in
Connectors:	4.3-10 Female

[1] Exclude connectors.

Environmental


Operation Temperature:	-40~+85°C
------------------------	-----------

How To Order

FPD2-500-6000-K3-4

Customization is available upon request.

Outline Drawings

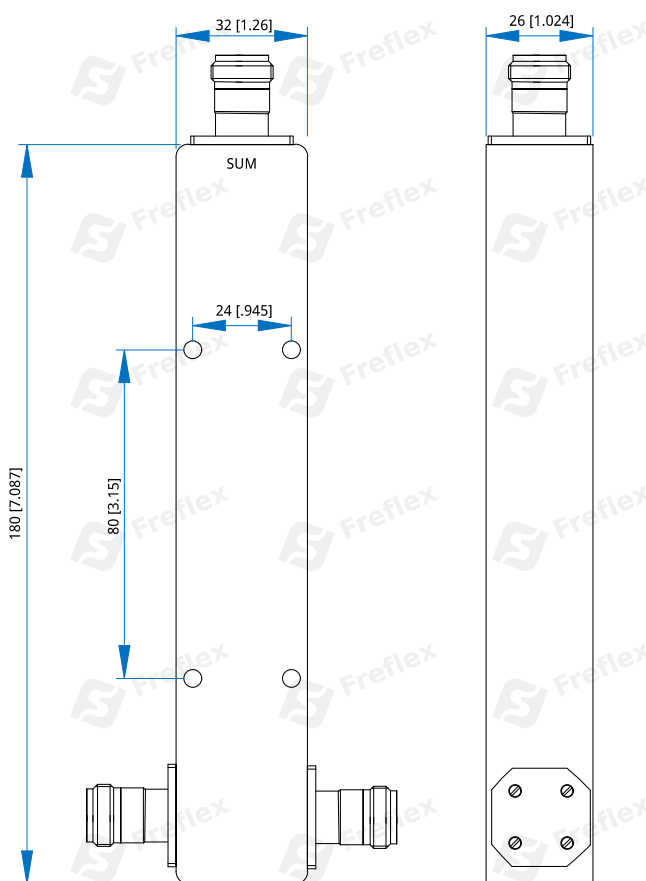

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]