

FPD3-1-300-1-S

3-Way, 0.001~0.3GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.001~0.3GHz
Insertion Loss:	1dB max.
VSWR:	1.35 max.
Isolation:	20dB min.
Amplitude Balance:	± 0.4 dB
Phase Balance:	$\pm 4^\circ$
Impedance:	50 Ω
Average Power:	1W

Mechanical


Size ^{*1} :	38.1*25.4*10mm 1.5*1*0.394in
Connectors:	SMA Female
Mounting:	2-M2, depth 8mm

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

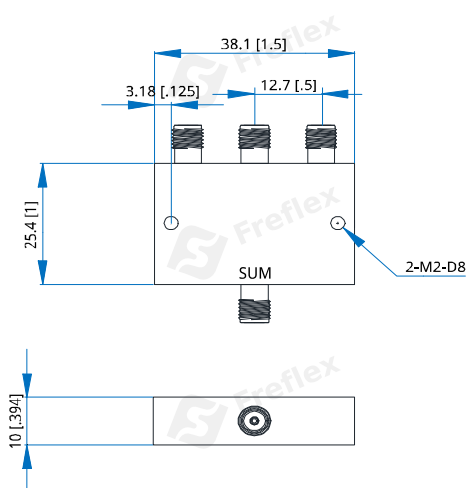

Unit: mm [in]
Tolerance: ± 0.3 mm [± 0.02 in]

How To Order

FPD3-1-300-1-S

Customization is available upon request.