

FPD3-336-366-30-N

3-Way, 336~366MHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	336~366MHz
Insertion Loss:	0.6dB max.
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	$\pm 3^\circ$
Impedance:	50 Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

Mechanical


Size ^{*1} :	195*74*20mm 7.676*2.913*0.787in
Connectors:	N Female
Mounting:	4- $\Phi 3.2$ mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+85°C
------------------------	-----------

Outline Drawings

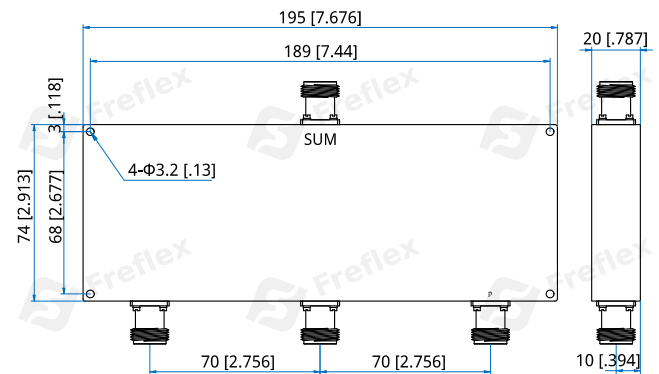

Unit: mm [in]

Tolerance: ± 0.5 mm [± 0.02 in]

How To Order

FPD3-336-366-30-N

Customization is available upon request.