

## FPD3-6000-40000-20-K

3-Way, 6~40GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	6~40GHz
Insertion Loss:	1.8dB max.
Input VSWR:	1.7 max.
Output VSWR:	1.7 max.
Isolation:	18dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±9° max.
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 2W max. as combiner

### Mechanical


Size <sup>*1</sup> :	38.1*43.2*12.7mm 1.5*1.701*0.5in
Connectors:	2.92mm Female
Mounting:	2-Φ2.4mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

### Outline Drawings

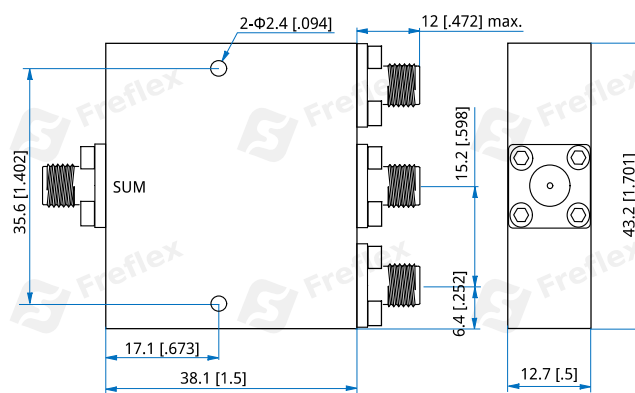

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### How To Order

**FPD3-6000-40000-20-K**

Customization is available upon request.