

## FPD4-18000-50000-20-2

4-Way, 18~50GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical

Frequency:	18~50GHz
Insertion Loss:	2.5dB max.
Input VSWR:	1.8 max.
Output VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	0.6dB max.
Phase Balance:	$\pm 10^\circ$
Impedance:	50 $\Omega$
Power @SUM Port:	20W max. as divider 1W max. as combiner

### Mechanical


Size <sup>*1</sup> :	24*52*10mm 0.945*2.047*0.394in
Weight:	60g
Connectors:	2.4mm Female (Stainless steel)
Mounting:	2- $\Phi$ 2.3mm through-hole

[1] Exclude connectors.

### Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

### Outline Drawings

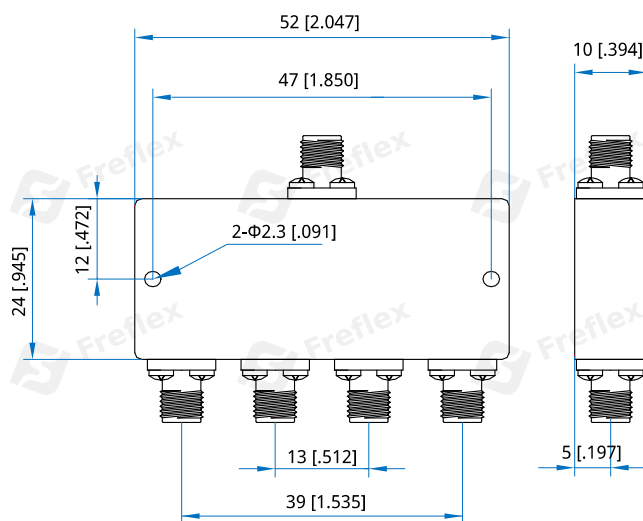

Unit: mm [in]

Tolerance:  $\pm 0.5$ mm [ $\pm 0.02$ in]

### How To Order

**FPD4-18000-50000-20-2**

Customization is available upon request.