

FPD4-2000-18000-20-N

4-Way, 2~18GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~18GHz
Insertion Loss:	2.2dB max.
Input VSWR:	1.6 max.
Output VSWR:	1.5 max.
Isolation:	17dB min.
Amplitude Balance:	±0.4dB max.
Phase Balance:	±6°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

Mechanical


Size ^{*1} :	102*60*20mm 2.362*2.717*0.787in
Connectors:	N Female
Mounting:	4-Φ3.5mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

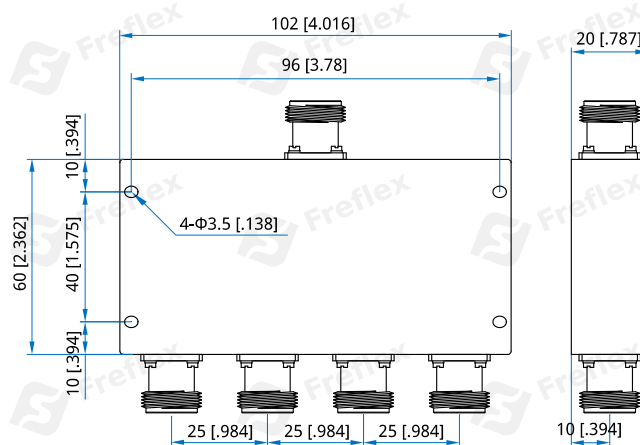

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD4-2000-18000-20-N

Customization is available upon request.