

FPD4-2000-6000-50-S

4-Way, 2~6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~6GHz
Insertion Loss:	1.5dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	±0.3dB
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	50W max. as divider 2.5W max. as combiner

Mechanical


Size ^{*1} :	94*60*10mm 3.701*2.362*0.394in
Weight:	220g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

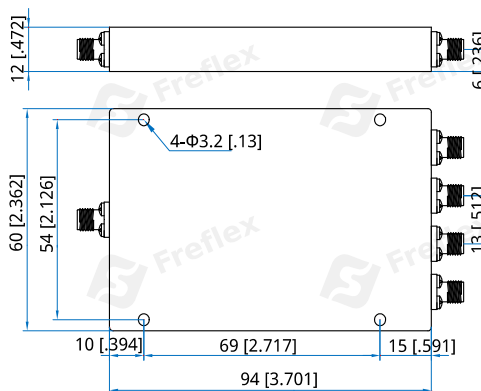

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD4-2000-6000-50-S

Customization is available upon request.