

FPD4-2500-4000-K2-N

4-Way, 2.5~4GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2.5~4GHz
Insertion Loss:	1dB max.
Input VSWR:	1.35 max.
Output VSWR:	1.25 max.
Isolation:	18dB min.
Amplitude Balance:	0.3dB max.
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	200W max. as divider 20W max. as combiner

Mechanical


Size ^{*1} :	108*102*22mm 4.252*4.016*0.866in
Weight:	850g
Connectors:	N Female
Mounting:	4-Φ4.4mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-35~+75°C
------------------------	-----------

Outline Drawings

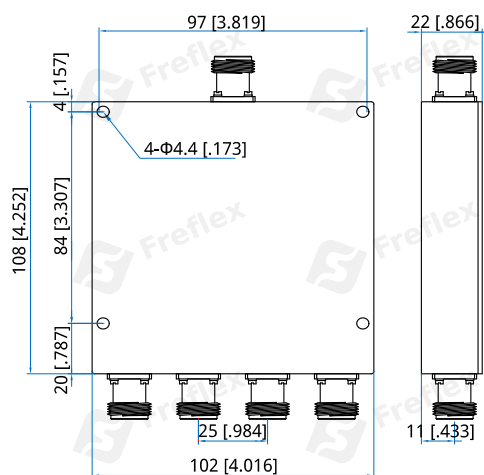

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD4-2500-4000-K2-N

Customization is available upon request.