

FPD4-5400-6800-20-S

4-Way, 5.4~6.8GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	5.4~6.8GHz
Insertion Loss:	0.6dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner
DC Current:	0.77A (193mA each) port

Mechanical


Size*1:	35*52*10mm 1.378*2.047*0.394in
Connectors:	SMA Female
Mounting:	2-M2.5mm depth 8

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

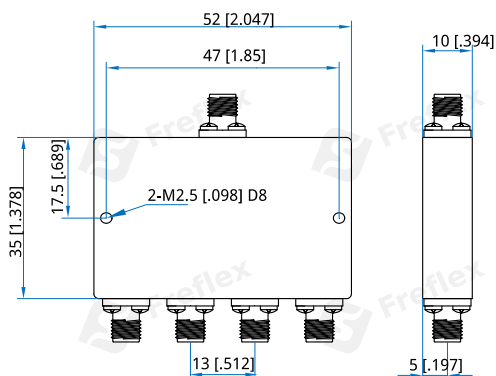

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD4-5400-6800-20-S

Customization is available upon request.