

FPD52-1000-2000-10-S

52-Way, 1~2GHz

Features:
* Small Size
* Low Insertion Loss

Applications: * Amplifiers

* Mixers * Antennas

* Laboratory Test

Electrical

Frequency: 1~2GHz
Insertion Loss: 4dB max.
VSWR: 1.65 max.

Isolation: 15dB min.

Amplitude Balance: 1dB max.

Phase Balance: ±1° max.

Power @SUM Port: 10W as divider

Mechanical

Size*1: 200*200*12.7mm

7.874*7.874*0.5in

Connectors: SMA Female


Mounting: 4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -40~+85°C

Outline Drawings

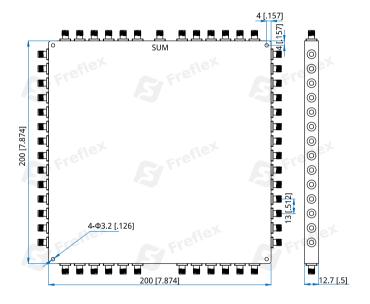

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FPD52-1000-2000-10-S

Customization is available upon request.

Freflex Inc. sales@freflex.com www.freflex.com Rev 1.1