

FPD52-200-2000-20-S

52-Way, 0.2~2GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.2~2GHz
Insertion Loss:	12dB max.
VSWR:	2 max.
Isolation:	15dB min.
Amplitude Balance:	± 1 dB max.
Phase Balance:	$\pm 2^\circ$ max.
Power @SUM Port:	20W as divider

Mechanical


Size*1:	280*280*12.7mm 11.024*11.024*0.5in
Connectors:	SMA Female
Mounting:	4- $\Phi 3.2$ mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

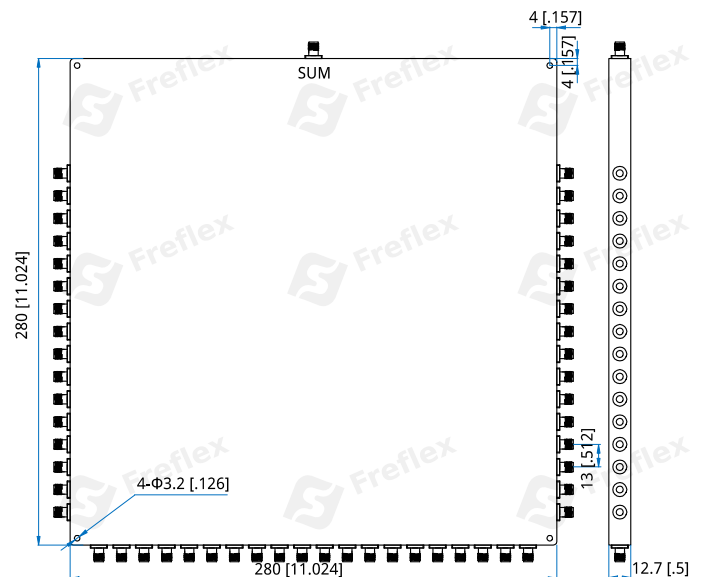

Unit: mm [in]

Tolerance: ± 0.3 mm [± 0.012 in]

How To Order

FPD52-200-2000-20-S

Customization is available upon request.