

FPD8-6000-50000-20-2

8-Way, 6~50GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	6~50GHz
Insertion Loss ^{*1} :	4.8dB max.
Input VSWR:	1.8 max.
Output VSWR:	1.8 max.
Isolation:	15dB min.
Amplitude Balance:	±0.8dB max.
Phase Balance:	±12° max.
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

[1] Excluding theoretical loss 9.0dB.

Mechanical


Size ^{*2} :	49*104*12.7mm 1.929*4.094*0.5in
Connectors:	2.4mm Female
Mounting:	3-Φ2.4mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

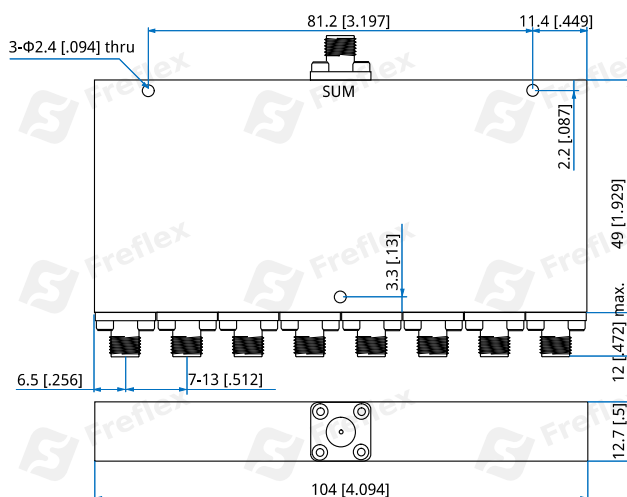

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FPD8-6000-50000-20-2

Customization is available upon request.