

FHC9-18000-40000-30-K

18~40GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	18~40GHz
Insertion Loss:	2.2dB max.
Directivity:	12dB min.
VSWR:	1.8 max.
Amplitude Balance:	±0.7dB max.
Phase Balance:	±10°
Average Power:	30W
Impedance:	50Ω

Mechanical


Size ^{*1} :	25.4*16*11mm 1*0.63*0.433in
RF Connectors:	2.92mm Female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

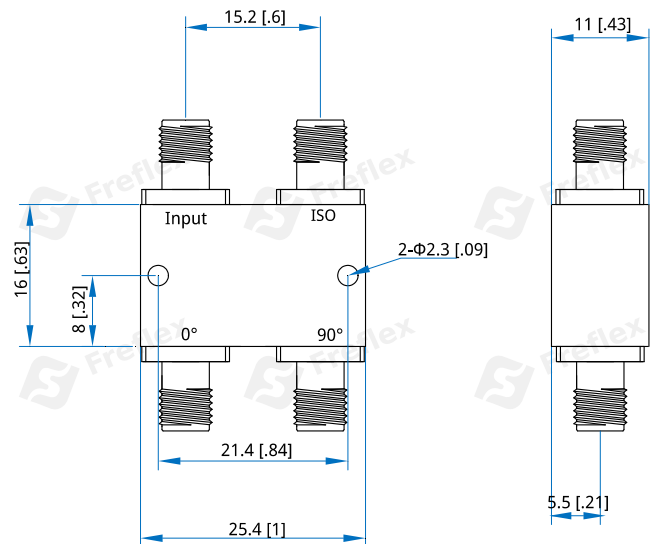

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHC9-18000-40000-30-K

Customization is available upon request.