

FHC9-2000-18000-30-S

2~18GHz, 30W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~18GHz
Insertion Loss:	2.2dB max.
VSWR:	1.45 max.
Isolation:	18dB min.
Amplitude Balance:	±1.0dB max.
Phase Balance:	±5°
Impedance:	50Ω
Average Power:	30W

Mechanical


Size ^{*1} :	60*25*11mm 2.36*0.99*0.43in
Weight:	55g
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

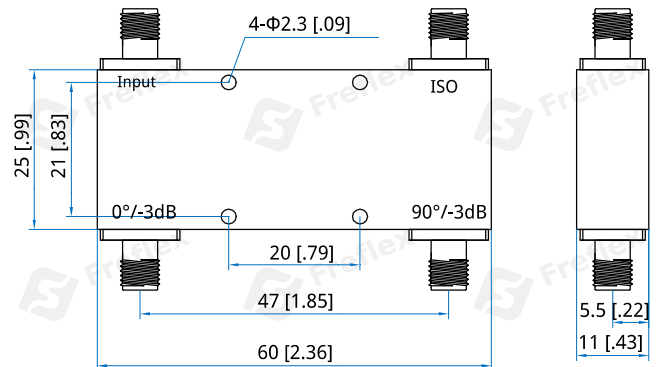

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHC9-2000-18000-30-S

Customization is available upon request.