

## FHC9-2000-26500-30-S

### 2~26.5GHz, 30W

#### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency:	2~26.5GHz
Insertion Loss:	2dB max.
Isolation:	10dB min.
VSWR:	1.8 max.
Amplitude Balance:	±1dB max.
Phase Balance:	±10°
Average Power:	30W
Impedance:	50Ω

#### Mechanical


Size <sup>*1</sup> :	37*18*11mm 1.457*0.709*0.433in
RF Connectors:	SMA female
Mounting:	2-Φ2.3mm through-hole

[1] Exclude connectors.

#### Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

#### Outline Drawings

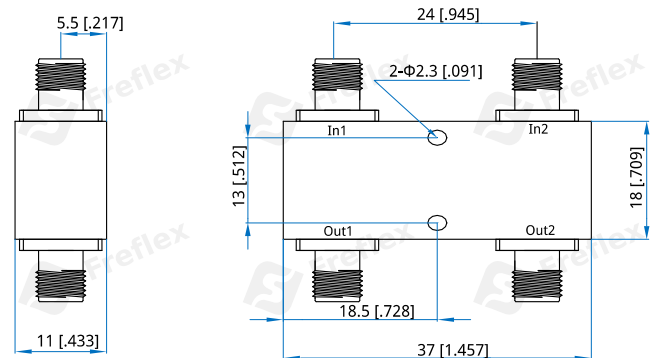

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### How To Order

**FHC9-2000-26500-30-S**

Customization is available upon request.