

FHC9-4000-10000-20-N

4~10GHz, 20W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~10GHz
Insertion Loss:	1dB max.
VSWR:	1.35 max.
Isolation:	20dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±4°
Impedance:	50Ω
Average Power:	20W

Mechanical


Size ^{*1} :	70*25*22mm 2.756*0.984*0.866in
Connectors:	N Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

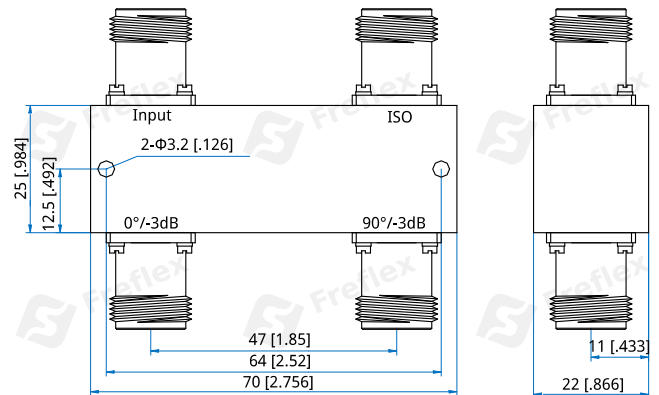

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FHC9-4000-10000-20-N

Customization is available upon request.