

FHC9-4000-12000-50-S

4~12GHz, 50W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	4~12GHz
Insertion Loss:	0.6dB max. (average)
VSWR:	1.5 max.
Isolation:	16dB min.
Amplitude Balance:	±0.6dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Average Power:	50W

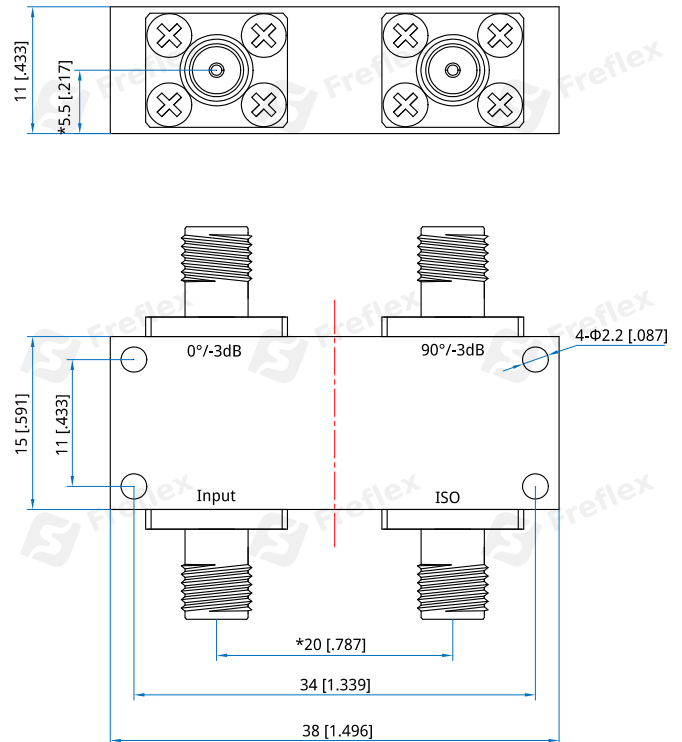
Mechanical

Size ^{*1} :	38*15*11mm 1.496*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.15mm [±0.006in]

*Ensure dimensions for design.

How To Order

FHC9-4000-12000-50-S

Customization is available upon request.